

Commercial Solution

2017



FANCY
DOORS
AND MOULDINGS

fancydoors.com

Pearl, Edmonton



Your Commercial Products Partner

From drawings to production to final installation, Fancy Doors and Mouldings can provide the products and expertise necessary to accommodate most any request. With doors up to 6 feet wide & 16 feet in height, and welded frames allows us the virtually any application, our commercial production facility allows us the latitude to produce products from standard to completely custom. An extensive hardware inventory gives us the flexibility to provide our customers a one stop supply experience.

33 Storeys



36 Storeys



11 Storeys




8 Storeys




26 to 30 Storeys



15 Storeys

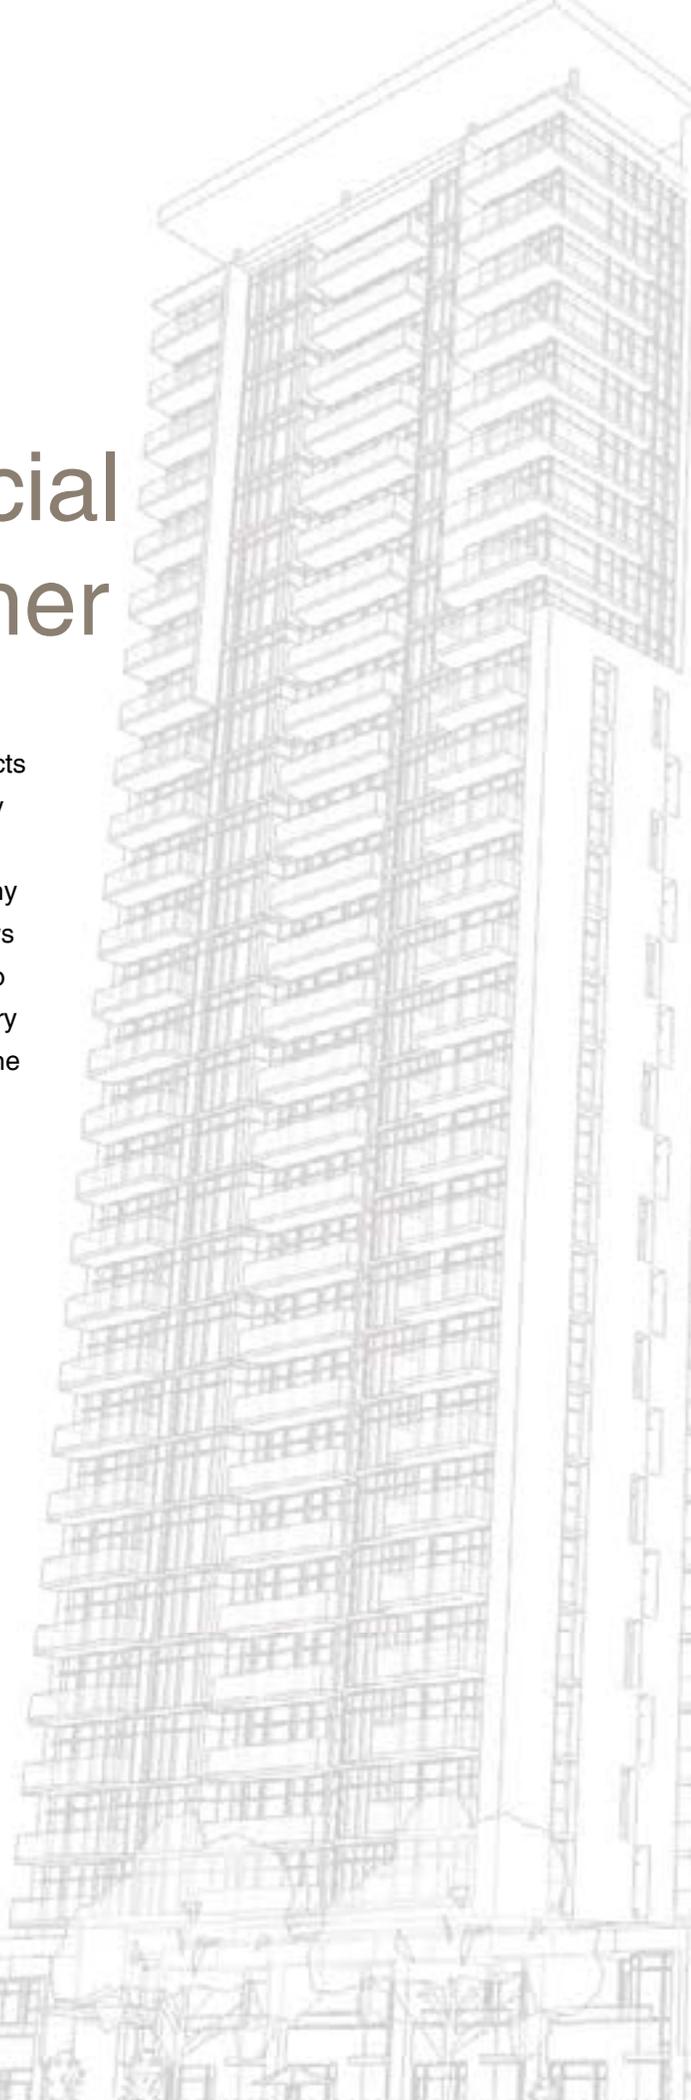



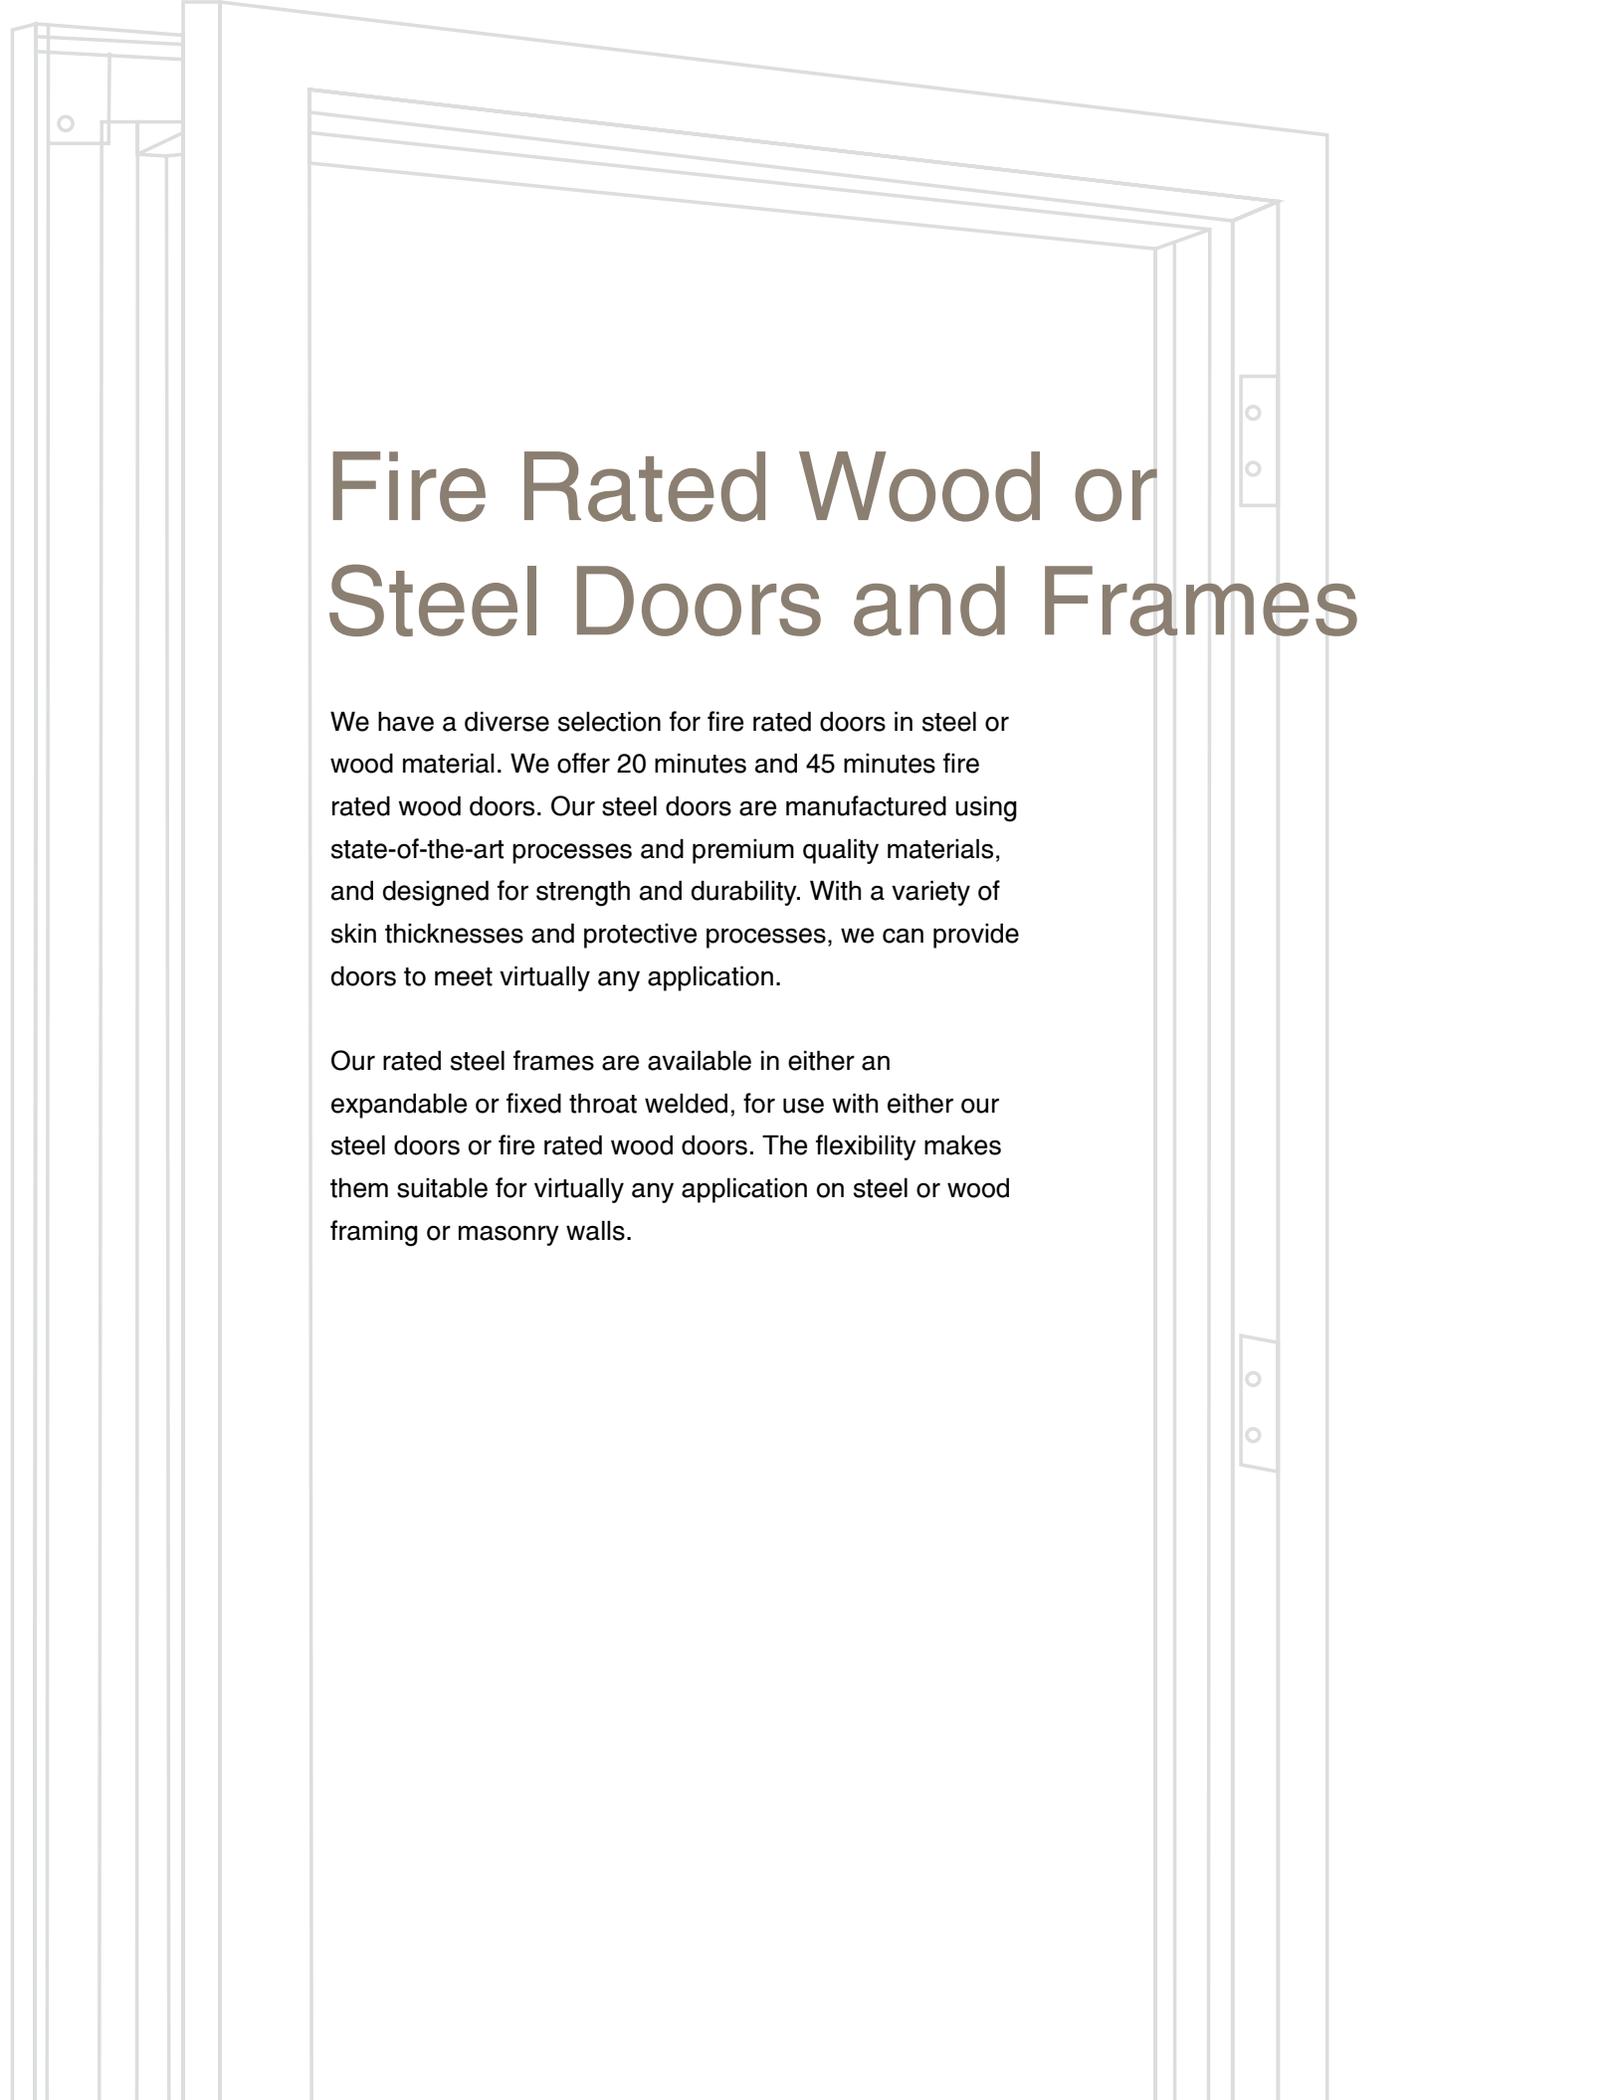


Fire Rated Wood or Steel Doors and Frames

We have a diverse selection for fire rated doors in steel or wood material. We offer 20 minutes and 45 minutes fire rated wood doors. Our steel doors are manufactured using state-of-the-art processes and premium quality materials, and designed for strength and durability. With a variety of skin thicknesses and protective processes, we can provide doors to meet virtually any application.


Our rated steel frames are available in either an expandable or fixed throat welded, for use with either our steel doors or fire rated wood doors. The flexibility makes them suitable for virtually any application on steel or wood framing or masonry walls.

FIRE RATED Steel Doors

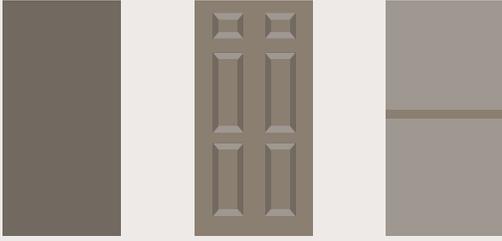

Door Designs

Diverse designs from standard flat industrial/commercial to the embossed decorative doors that would enhance any entrance way.

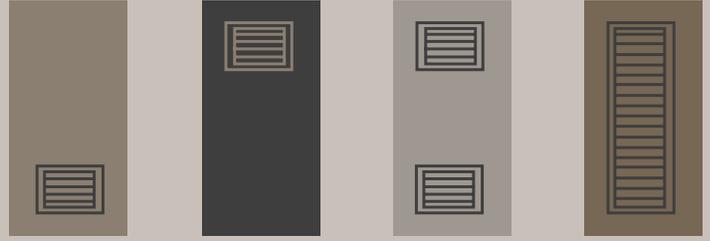

Louvers

Require special air circulation for either heating or cooling? No problem, we offer doors with variety of louver openings, both bottom and top.

FEATURES

Closer Reinforcing

All doors come with a closer reinforcement box at the top of each door and also the bottom of the door when reversible.

Panic-Bar Reinforcing

Reinforcing box for Panic-Bar ensures that hardware remains secure and fully functional.

Standard Hinge Preparation

On doors up to 7'-6" high: 1-1/2 pair of 4-1/2" x 4-1/2" template hinge reinforcements. On doors over 7'-6" high: 2 pair of 4-1/2" x 4-1/2" template hinge reinforcements.

End Channels

Projection-welded end channels at 3" to 4" centres, add strength and durability.

Lock Seam

Extra deep vertical mechanical full lock seam construction helps retain the quality and integrity of the door. A special sealant adhesive is also used on the edges to provide maximum strength and rigidity.

Inner core

Honeycomb cell paper comes with impregnated resin.

Standard Lock Preparation


All doors include a Govt. #161 lock reinforcement with full barrel support or panic-bar reinforcing.

Surface Bolt Reinforcing


Special reinforcing plates for surface bolt preparation can be installed as an option.

Edge Tabs

Special Edge Tabs for flush bolt preparation can be installed as an option.

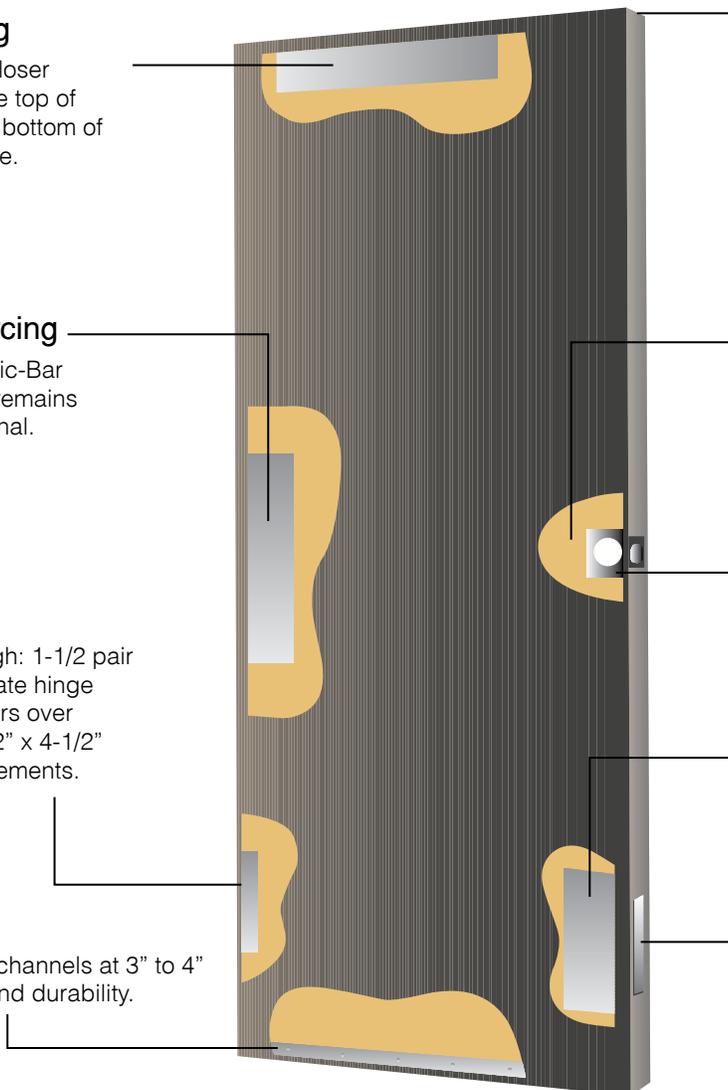

DESIGN Options

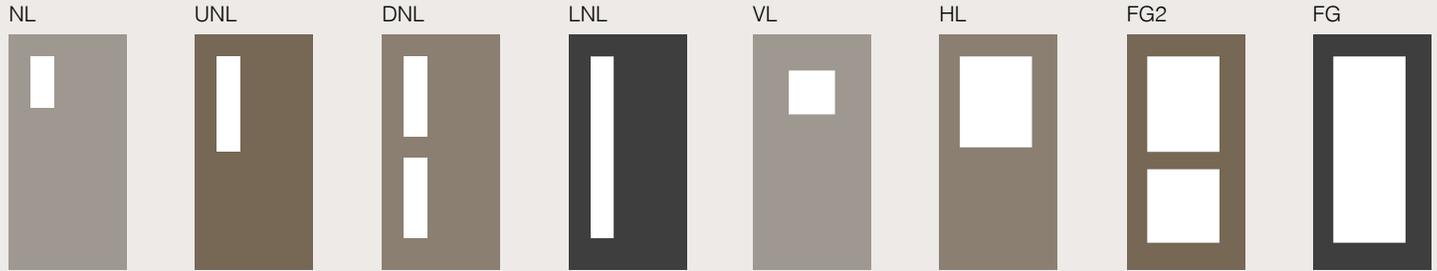

Glass Lites

Window kits can be installed with any size or shape you desire. Ask us for details.

INNER CORE Construction

You have a choice of five different inner cores.




Standard Honeycomb Core

- Rigid and impact resistant.
- 1" honeycomb cell paper construction has sanded edges.
- Resin impregnated.
- R factor: 2:4
- STC 20 in (sound transmission) 20 gauge material.
- Flat or 6 panel surface.




PolyStyrene Core

- 1-3/4" polystyrene composite construction.
- All reinforcing boxes contain polystyrene.
- Flat or 6 panel embossed surface.
- R factor: 7:0
- STC 26 in 20 gauge material.




Polyurethane Core

- 1-3/4" polyurethane composite.
- All reinforcing boxes contain polyurethane.
- Excellent insulating.
- R factor: 12:0
- STC 26 in 20 gauge material.



Steel-Stiffened Core

- 20 gauge vertical steel stiffeners are welded or laminated to door skins at 6" centres.
- Fiberglass insulation provides excellent sound-deadening.
- For extra heavy-duty requirements, door edges can be tack-welded, filled and ground smooth.




Temperature-Rise Core


- Solid mineral-fibre core slab.
- Exceeds current NFPA-80 recommendations.
- Ideal for stairwells and installations adjacent to fire-walls.

STANDARD Frames


“AS” material

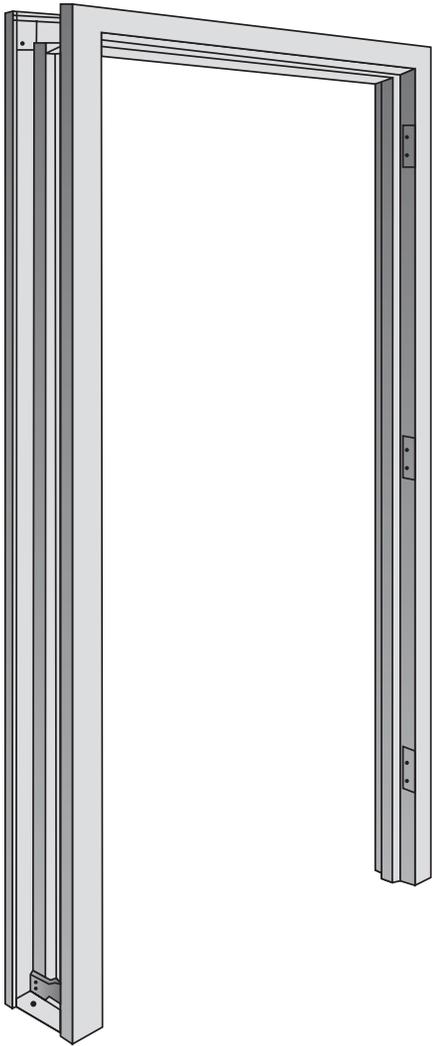


Our standard steel door frames are available in 14, 16 and 18 gauge wipe-coat galvanized steel and can be manufactured to meet all architectural design specifications. Warnock Hersey fire labeling is available when required. Standard profiles include 4-3/4", 5-3/4", 6-3/4" and 8-3/4".




- All KD frames have precise, mitred corners.
- All welded corners are ground smooth and primed for a more attractive finish.
- A special tab holding system provides additional strength and locks the frame in position on the stud.



- Special mortar guards on hinge reinforcements to prevent mortar fill-in.
- 10 gauge galvanized reinforcements add strength and help prevent sagging.



- One-piece reinforcements are projection-welded in place to increase strength and rigidity.




- 16 gauge wipe-coat galvanized floor anchor is welded in place for easier fastening.
- 5/8" stops provide a large surface for weather-stripping.
- Frame is prepared for silencer bumper holes.

FRAME Installation


With all frame, drywall rough opening should be 2" wider and 1" higher than door width and height.

1. Centre header piece in rough opening.
2. Slip jamb tabs into header slots, pivot jambs to locked position. Adjustable anchors should be as tight as possible in throat opening.
3. Locate removable wooden spreader bar at base.
4. Bend corner tabs to attach header piece.
5. Square the frame and tighten adjustment screws.

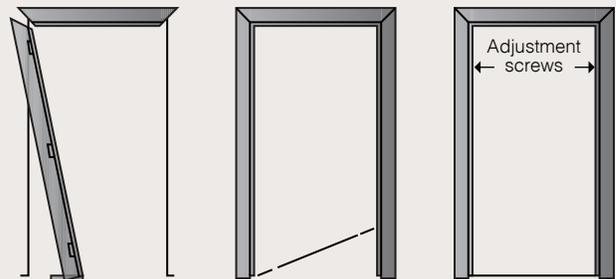


DRYWALL Frames


“KDDW” material

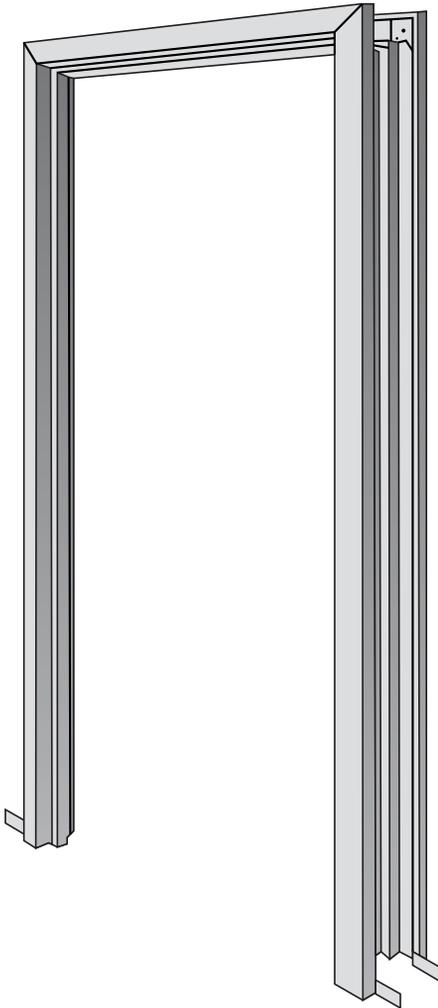

Our drywall frames are available in 18 gauge wipe-coat galvanized and 16 gauge. They can be accommodated any wall thickness and heavier interior applications. Standard drywall KDDW frames are available in 4-1/2", 5-5/8", 5-3/4" or 5-7/8" jamb depths.



- Accurately machined mitres make corners smooth and attractive.



- Adjustable tension anchor for secure anchoring.



- 18 gauge galvanized strike-box reinforcements are projection-welded to the frame.



- 10 gauge galvanized hinge reinforcements are also projection-welded to the frame.

EXPANDABLE Drywall Frames

“EP” Material

An expandable frame that can be adapt to 3 1/2" to 12" wall condition. This product is ideal for that difficult project requiring various jamb-depth material. This 16 or 18 gauge product is prepared for silencer holes, ASA strike, counter sunk face holes and 4 1/2" hinge reinforcements. This product can be fire-rated covering an opening up to 8'0" x 8'0" with a 1 1/2 hour rating.

FIRE RATED Wood Doors

20 minutes | 40 minutes fire rated wood doors



Architectural Wood Veneers

Meet or exceed WDMA / HPVA architectural standards. (AWI, AWMAC and WI on request.)



StilleLine™ Sketchface Natural Wood Veneers

Borrowing from traditional furniture craft of wood inlays, StilleLine™ sketchface veneer offers a unique appearance. The warmth of wood is accentuated in a product that can deliver an exciting, modernist look, with parallel, diagonal or opposing grain orientation. Create custom designs with a combination of veneer species on one monolithic face. Also available in primed hard board and recessed panel configurations.



Light Commercial Veneers

Attractive pricing with the beauty of wood. (Does not meet HPVA)



Plastic Laminate (High Pressure Decorative Plastic Laminate)

Uniform appearance, low maintenance and excellent stain resistance. Enormous colour and finish selection from a variety of national manufacturers.



Profiled (Molded) and Flush Paint Grade

Well-priced, versatile and relevant across all design vernaculars, the classic appeal of profile paint grade surfaces has made this product a dominant part of the North American built environment.



Finished Hardboard

Much of the character of wood veneers in a hard, durable, easy-care surface. Clean appearance with a low price point.



- 1** Lyptus Architectural Wood Veneer
- 2** StileLine™ Sketchface Natural Wood Veneer
- 3** Oak Light Commercial Veneer
- 4** Walnut Plastic Laminate
- 5** Crossmore Molded Panel
- 6** Newport Cherry Finished Hardboard





Hardware and Accessories

Hardware completes the installation of your new door. Our wide selection of door handles and knobs, door hinges and door locks will enable you to find hardware that complements your décor. Complete the look of your exterior door with knockers and protect your investment with door stops and kick plates. Get the passage, privacy, or dummy knob/lever you require so that your door will best serve its purpose.

Door handles, hinges and locks required for your door vary depending on a number of factors, such as whether the door is an interior or exterior unit, the purpose the door is serving and what style of door you have chosen. We carry most trusted brands like Weiser, Taymor, Emtek, Dorex, Cendrex and SOSS.

WEISER



EMTEK

DOREX



cendrex

SOSS



BATH Accessories

Taymor.

Ideal for any commercial property like hotel or motel



Soap Dispenser


- 4-13 oz. (400 ml) removable reservoirs
- Overall size: 10 1/4" H x 9 - 13/16" W x 3 - 1/8" D
- Model: 02-D1364
- Case/Qty.: 12



2- Guest Towel Shelf

Guest Towel Shelves

- Exposed surface mount application.
- Includes #8 x 1-1/4" mounting screws and 2 welded mounting plates constructed of triple chrome plated steel.
- Model: 01-1062 [2-Guest Towel Holder]
- Model: 01-1064 [4-Guest Towel Holder]
- Case/Qty.: 4



Shelf with Bar



Shelf with Double Bar

Towel Shelves

- Semi-concealed surface mount application.
- Includes 4 plastic anchors and 4 steel Philips head screws -#8x2"
- 3/4 tubing
- Model: 01-1043 [18" Towel Shelf with Bar]
- Model: 01-1044 [24" Towel Shelf with Bar]
- Model: 01-1045 [24" Towel Shelf with Double Bar]
- Case/Qty.: 5



Recessed Extra Roll Paper Holder

- Polished chrome.
- Model: 01-1070
- Case/Qty.: 10
- Overall size: 6 5/16" w x 6 5/16" H x 4" D
- Wall Opening: 5 1/4" w x 5 1/4" H x 3 7/8" D



Surface Mount Fixed Rod Single Roll Paper Holder

- Polished chrome.
- Model: 01-F1015
- Case/Qty.: 10
- Overall size: 5 15/16" w x 2 13/16" H x 4 1/4" D



Surface Mount Double Fixed Rod Paper Holder

- Polished chrome.
- Model: 01-F1030
- Case/Qty.: 10
- Overall size: 11" w x 2 3/4" H x 4 1/4" D



Recessed Paper Holder

- Polished chrome.
- Model: 01-101S.
- Case/Qty.: 50
- Satin Nickel recessed aluminum roller
- Model: 02-D101SSN.
- Case/Qty.: 4
- Overall size: 6 1/8" W x 6 1/8" H, Wall opening: 4 3/4" w x 4 3/4" H



Twin Recessed Paper Holder

- Polished chrome.
- Model: 01-TW101S.
- Case/Qty.: 10
- Overall size: 12 3/16" W x 6 1/16" H x 1 7/8" D,
- Wall opening: 11 3/16" W x 5 1/8" H x 1 7/8" D,



Retractable Clothes Line

- Polished chrome.
- Model: 02-D1099
- Case/Qty.: 10
- Overall size: 3 5/8" diameter x 1 1/8" deep



Recessed Tissue Dispenser

- Polished chrome.
- Model: 01-1010
- Case/Qty.: 10
- Overall size: 11 15/16" W x 6" H x 2 3/8" D,
- Wall opening: 10 11/16" W x 4 7/8" H x 2 3/8" D,
- Capacity: 150 two ply sheets



Commercial Grab Bars

- Stainless steel construction
- Non-slip peened grip
- Includes mounting hardware
- Satin Stainless Steel 32D
- Model: 01-TC220012 [12" Grab Bar - 1-1/4" O.D.]
- Model: 01-TC220018 [18" Grab Bar - 1-1/4" O.D.]
- Model: 01-TC220024 [24" Grab Bar - 1-1/4" O.D.]
- Model: 01-TC220030 [30" Grab Bar - 1-1/4" O.D.]
- Model: 01-TC220036 [36" Grab Bar - 1-1/4" O.D.]
- Model: 01-TC220048 [48" Grab Bar - 1-1/4" O.D.]
- Case/Qty.: 5

KNIGHT Leverset

Taymor.

Grade 1 - maximum duty



Features

- ANSI/BHMA 156.2 grade 1
- Maximum duty cylindrical construction
- Fully reversible lock
- Concealed screw mount
- Fixed backset 2-3/4"
- 1-1/8" x 2-1/4" square Mortise latch
- 10 year mechanical warranty



Full keying services available

6 pin SC4 keyway, packaged in Keyed Different.



Fire Rated

Meets c-UL and UL 3-hour fire rating standards.



■ Satin Chrome 26D

Model: 32-6953 [ENTRY - Entrance/Office leverset] | Case/Qty.: 10
Model: 32-6940 [PRIVACY - Restroom leverset] | Case/Qty.: 10
Model: 32-6910 [Passage - Hall/Closet leverset] | Case/Qty.: 10
Model: 32-6980 [Storeroom] | Case/Qty.: 10
Model: 32-6970 [Classroom] | Case/Qty.: 10

COMMERCIAL Deadbolt

Taymor.

Grade 1 - maximum duty



Features

- ANSI/BHMA 156.2 grade 1
- Maximum duty cylindrical construction
- Fully reversible lock
- Concealed screw mount
- Fixed backset 2-3/4"
- 1-1/8" x 2-1/4" square Mortise latch
- 10 year mechanical warranty



Full keying services available

6 pin SC4 keyway, packaged in Keyed Different.



Fire Rated

Meets c-UL and UL 3-hour fire rating standards.



■ Single Cylinder Deadbolt

Model: 32-F740 [Polished Chrome 26] | Case/Qty.: 20
Model: 32-F780 [Satin Chrome 26D] | Case/Qty.: 20

■ Double Cylinder Deadbolt

Model: 32-F790 [Satin Chrome 26D] | Case/Qty.: 20

CITADEL Leverset

Taymor.

Grade 2 - heavy duty cylindrical construction



Full keying services available
6 pin SC4 keyway, packaged in Keyed Different.



Fire Rated
Meets c-UL and UL 3-hour fire rating standards.



Features

- ANSI/BHMA 156.2 grade 2
- Fully reversible lock
- Fixed backset 2-3/4" (70 mm)
- 5 year mechanical warranty

■ Satin Chrome 26D

- Model: 32-5553C26D [ENTRY - Entrance/Office leverset] | Case/Qty.: 6
- Model: 32-5540C26D [PRIVACY - Restroom leverset] | Case/Qty.: 6
- Model: 32-5510C26D [Passage - Hall/Closet leverset] | Case/Qty.: 6
- Model: 32-5580C26D [Storeroom] | Case/Qty.: 6
- Model: 32-C5580C26D [Storeroom w/clutch mechanism] | Case/Qty.: 6
- Model: 32-5570C26D [Classroom] | Case/Qty.: 6
- Model: 32-5525C26D [Communicating passage/exit non-key] | Case/Qty.: 6
- Model: 32-5582C26D [Institution] | Case/Qty.: 6
- Model: 32-C5593C26D [Dummy] | Case/Qty.: 12

DUKE Leverset

Taymor.

Grade 2 - heavy duty cylindrical construction



Full keying services available
6 pin SC4 keyway, packaged in Keyed Different.



Fire Rated
Meets c-UL and UL 3-hour fire rating standards.



Features

- ANSI/BHMA 156.2 grade 2
- Fully reversible lock
- Fixed backset 2-3/4" (70 mm)
- 5 year mechanical warranty

■ Satin Chrome 26D

- Model: 32-7953 [ENTRY - Entrance/Office leverset] | Case/Qty.: 10
- Model: 32-795334SC [ENTRY - 3/4" latch**] | Case/Qty.: 6
- Model: 32-7940 [PRIVACY - Restroom leverset] | Case/Qty.: 10
- Model: 32-794034SC [PRIVACY - 3/4" latch**] | Case/Qty.: 6
- Model: 32-7910 [Passage - Hall/Closet leverset] | Case/Qty.: 10
- Model: 32-791034SC [Passage - 3/4" latch**] | Case/Qty.: 6
- Model: 32-7980 [Storeroom] | Case/Qty.: 10
- Model: 32-798034SC [Storeroom - 3/4" latch**] | Case/Qty.: 6
- Model: 32-7970 [Classroom] | Case/Qty.: 10
- Model: 32-797034SC [Classroom - 3/4" latch**] | Case/Qty.: 6
- Model: 32-7925 [Communicating passage / exit non-key] | Case/Qty.: 10
- Model: 32-792534SC [Communicating passage - 3/4" latch**] | Case/Qty.: 6
- Model: 32-7993 [Dummy] | Case/Qty.: 10

■ Satin Chrome 26D (Clutch)

- Model: 32-5953* [ENTRY - Entrance/Office leverset] | Case/Qty.: 10
- Model: 32-5940* [PRIVACY - Restroom leverset] | Case/Qty.: 10
- Model: 32-5980* [Storeroom] | Case/Qty.: 10
- Model: 32-5970* [Classroom] | Case/Qty.: 6

* Clutch Mechanism. ** For rated paired door application per NFPA80.

EXCALIBUR Leverset

Taymor.

Grade 2 - heavy duty cylindrical construction



Features

- ANSI/BHMA 156.2 grade 2
- Fully reversible lock
- Fixed backset 2-3/4" (70 mm)
- 5 year mechanical warranty

■ Satin Chrome 26D

Model: 32-4953* [ENTRY - Entrance/Office leverset] | Case/Qty.: 10
Model: 32-4940* [PRIVACY - Restroom leverset] | Case/Qty.: 10
Model: 32-4910 [Passage - Hall/Closet leverset] | Case/Qty.: 10
Model: 32-4980* [Storeroom] | Case/Qty.: 10
Model: 32-4970* [Classroom] | Case/Qty.: 10

* Clutch Mechanism.

YORK Leverset

Taymor.

Grade 2 - heavy duty cylindrical construction



Features

- ANSI/BHMA 156.2 grade 2
- Fully reversible lock
- Fixed backset 2-3/4" (70 mm)
- 5 year mechanical warranty

■ Satin Stainless Steel 32D

Model: 32-8953 [ENTRY - Entrance/Office leverset] | Case/Qty.: 20
Model: 32-8940 [PRIVACY - Restroom leverset] | Case/Qty.: 20
Model: 32-8910 [Passage - Hall/Closet leverset] | Case/Qty.: 20
Model: 32-8980 [Storeroom] | Case/Qty.: 20
Model: 32-8970 [Classroom] | Case/Qty.: 20
Model: 32-8993 [Dummy - Single side knobset] | Case/Qty.: 100

COMMERCIAL Deadbolt

Taymor.

Grade 2



Commercial Single Cylinder Deadbolt



Single sided communicating Deadbolt



Occupancy Indicator Deadbolt

Features

- ANSI/BHMA 156.2 grade 2
- Solid brass cylinder
- 2-in-1 adjustable backset latch 2-3/8" to 2-3/4" for A & C
- Fixed backset latch 2-3/4" for B
- 1"x2-1/4" square mortise latch
- 5 year mechanical warranty

■ Commercial Single Cylinder Deadbolt

Model: 32-F740 [Satin Chrome 26D] | Case/Qty.: 20
Model: 32-F450 [Satin Stainless Steel 32D] | Case/Qty.: 20

■ Single Sided Communicating Deadbolt

Model: 32-F218 [Satin Chrome 26D] | Case/Qty.: 20

■ Occupancy Indicator Deadbolt

Model: 32-F238 [Satin Chrome 26D] | Case/Qty.: 20
Model: 32-F238SS [Satin Stainless Steel 32D] | Case/Qty.: 20



Full keying services available
6 pin SC4 keyway, packaged in
Keyed Different.



Fire Rated
Meets c-UL and UL 3-hour
fire rating standards.

600 SERIES Door Closure

Taymor.

Grade 3



Features

- ANSI/BHMA 156.4 grade 3
- Spring size 2, 3 and 4
- High strength aluminum alloy body
- Non-handed
- Two independent adjustable valves control sweeping and latching speed
- Universal mounting (regular and parallel brackets included)
- Supplied with machine and wood screws
- 5 year mechanical warranty

■ Aluminum

Model: 14-602AL [Size-2, 36"x84", 55-100 lbs] | Case/Qty.: 10
Model: 14-603AL [Size-3, 38"x84", 88-144 lbs] | Case/Qty.: 10
Model: 14-604AL [Size-4, 42"x96", 132x187 lbs] | Case/Qty.: 10
Model: 14-C1600AL [Decorative cover] | Case/Qty.: 10

1900 SERIES Door Closure

Taymor.

Grade 1 - Power adjustable



Features

- ANSI/BHMA 156.4 grade 1
- UL and c-UL listed; UL10c for positive pressure
- Closing power adjustable from sizes 1 to 6
- Barrier-free operation for the strictest requirements in accessibility
- Will fit all sizes and weights of swinging doors
- Ideally suited for doors in high traffic areas
- Standard back check, sweep and latching speed
- Universal mounting; regular and parallel bracket included
- Non-handed installation
- Aluminum die-cast body
- 10 year mechanical warranty

■ Aluminum

Model: 13-1900AL [Size-1-6, 48"x96", 266 lbs] | Case/Qty.: 6
Model: 13-1900BFDAAL [Size-1-6, 48"x96", 266 lbs with delayed action] | Case/Qty.: 6

CTR Access Door

ceadrex

With hidden flange for all surface types



Features

- The CTR is the newest generation of all purpose access doors
- Easy to install, it will blend into all non-rated surfaces better than any other door
- European type hinge allows the door, with its beveled edges, to close over the flange thus avoiding the additional labor to mud or plaster over the flange
- A truly cohesive appearance due to its well-integrated design of concealing the space between the panel and the flange

AHD Access Door

ceadrex

General purpose for all surface type



Features

- The AHD is designed for a quick and easy installation on non-rated vertical and horizontal surfaces made of drywall or any other type of material
- Rounded mitered corners, concealed pin hinge and 3/8" return all around the door make it the sturdiest door on the market
- Prevents sagging, as compared to flat door panels, and requires fewer locks

PFI Access Door

ceadrex

Fire rated insulated for all surface types



Features

- The PFI is insulated with 2" thick mineral wool and can be used on fire rated walls and ceilings. It comes with a 1" flange for an easy flush installation on any type of surface
- As per UL and NFPA 80 standards, once the installation is complete and the provided springs are hooked to the back of the panel, the door will be self closing and self locking
- The largest fire rated PFI doors available for vertical and horizontal installations are respectively: (48"x 48" or 2304 sq. in.) and (24"x 36" or 864 sq. in.)

TRH Roof Hatches

ceadrex

Convenient access to building roof tops



Features

- Made of galvanized steel
- Equipped with gas cylinders providing an effortless opening of the door panel
- Heavy duty design and insulation ensure long life and low maintenance

CHECK Chains

DOREX

General hardware



Features

- Two tension coil springs
 - Stamped steel mounting brackets
 - Mounting hardware included: self-tapping screws
- #3550 includes grey vinyl cover, with two expansion springs

DOOR Viewer

DOREX

Security product



Features

- Solid brass door viewer
- For 1 3/8" (35mm) to 2" (51mm) door thickness
- Polished optical glass lenses
- Rated: 20 minutes fire resistance on wood door and 90 minute fire resistance on steel door
- Individual boxed
- Finish: polished brass or polished chrome

KEY Cabinet & Box

DOREX

Security product



Features

- Sturdy all metal construction with rounded corners allow for better strength and durability
- Heavy gauge seamless steel
- Scratch resistant light grey paint
- Rust proof
- Complete with key hooks, key tags, 2 screws and plugs
- Pre-slotted mounting holes
- Lockable cabinet standard KD version, KA version available with purchase of replacement CL50 keyed alike cam locks, 2 keys per cabinet / cam lock supplied

DOME Door Stop

DOREX

General hardware



T200 - low dome



#T201 - 1/4"
(6.4mm) Riser



T218 - high dome

Features

- Mounting hardware included: wood screw with plastic anchor

WALL MOUNTED Door Stop

DOREX

General hardware



T231



T233

Features

- Concealed fastening
- Mounting hardware included: wood screws, drywall anchors

FLOOR MOUNTED Door Stop

DOREX

General hardware



R470/R471



R472/R473

Features

- Mounting hardware include:
 - #R470 - wood screws
 - #R471 - masonry anchor, wood screws
 - #R472 - wood screws
 - #R473 - masonry anchor, wood screws

#R470REP - Replace rubber tip

KICK DOWN Door Holder

DOREX

General hardware




Features

- Sturdy all metal material for better strength and durability
- Rubber base to protection for the floor
- Easy to operate
- Easy for installation

FLUSH Pulls

DOREX

General hardware

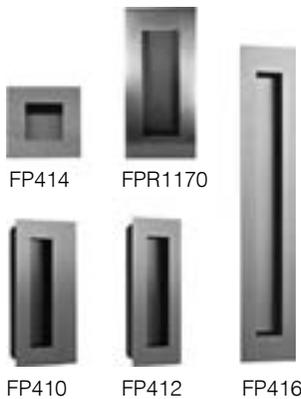

Features

- For wood doors
- Light weight
- Easy for installation

DOOR Pull with Push Plate

Taymor

Commercial architectural hardware



Features

- 0.046" (1.17 mm) gauge aluminum
- Includes self tapping screws suitable for metal or wood doors
- Model: 25-D400916 | Case/Qty.: 20

DRAFT Guard

DOREX

Mail slot



Features

- Closed air-chamber (insulating air-cushion avoids loss of warmth)
- No air circulation (dust-proof)
- No drafts
- Noise reducing
- Rotating self-closing unit

		12 7/32" x 3 5/32"	15 3/4" x 3 5/32"
	Anodized satin silver (EV1) Black plastic housing and frame	461001	462001
	Anodized medium bronze (EV4) Black plastic housing and frame	461004	462004
	Anodized dark bronze (EV5) Black plastic housing and frame	461005	462005
	Anodized brass (EV3) Black plastic housing and frame	461006	462006
	Polyester powder coated, white (RAL9010) White plastic housing and frame	461007	462007
	Polyester powder coated, black (RAL 9011) Black plastic housing and frame	461010	462010
	Anodized satin nickel Black plastic housing and frame	461011	462011

8000/8500 SERIES Exit Devices

Trims and accessories



8503



8504



8505



8500B



8500FC



8500FH



8000DT



8000NL



8000NLS

8500 SERIES Exit Device

DOREX

Touch pad



Features

- Push pad type:
 - » Rim (non-handed)
 - » Surface vertical (non-handed)
- Field sizable
- 2 7/8" (73mm) backset
- Stainless steel latch bolt with 3/4" (19mm) throw
- Stainless steel springs
- Conforms to ANSI/BHMA A156.3, Grade 2
- Dogging by hex key on non-fire labeled device
- cULus listed for Panic Hardware
- cULus listed for 1 1/2 hours for Fire Exit Hardware
- 1 year limited warranty

9600 SERIES Exit Devices

DOREX

Trims for heavy-duty applications



9600TT03



9600TT04



9600TT05



9600TE10



9600TE70
9600TE80

9500 SERIES Exit Device

DOREX

Heavy-duty push pad



Features

- Push pad type:
 - » Rim (non-handed)
 - » Surface vertical (handed, reversible)
- Field sizable
- Stainless steel latch bolt with 3/4" (19 mm) throw
- Stainless steel springs
- Conforms to ANSI/BHMA A156.3, Grade 1
- Dogging by hex key on non-fire labeled device
 - » Optional key cylinder dogging available
- cULus listed for Panic Hardware
- cULus listed for 3 hours for Fire Exit Hardware
- Wide variety of optional exterior trims and accessories
- 5 year limited warranty

BALL BEARING Hinges

DOREX

Ball bearing template butt hinges



Features

- Non-handed
- High quality steel base material
- High grade plated finishes
- Non-rising removable pins
- Non-removable pin (NRP) available on all models
- Standard template hole pattern conforming to ANSI standard A156.7
- Quality wood screws and undercut machine

216 Invisible Hinge

SOSS

Wood and metal application



Features

- Superior appearance and durability
- Flush fit, compact size and smooth operation
- Invisible Hinges open a full 180°
- A single action hinge

218 Invisible Hinge

SOSS

Wood and metal application



Features

- Superior appearance and durability
- Flush fit, compact size and smooth operation
- Invisible Hinges open a full 180°
- A single action hinge

FDM 2503 Steel Hardware

Stainless steel hardware for sliding door



Sliding roller: TY2.040.003.92



Sliding roller: TY2.040.047.92



Sliding roller: TY2.040.036.92



Sliding roller: TY2.040.023.92

FDM 2505 Black Hardware

Black hardware for sliding door



Soft closer: TY2.099.033.00



Actuator: TY2.099.025.22



FANCY DOORS AND MOULDINGS

4421 Roper Road NW Edmonton, AB T6B 3S5 | 780-432-7700 | www.fancydoors.com

Product illustration and images in this catalog may not accurately reflect the colors specified due to the printing process. Fancy doors and Mouldings reserve the right to change product specifications without notice. The name and logo of Lynden, Artek, Weiser, Taymor, Emtek, Dorex, Cendrex, and SOSS are reserved their trademark respectively.